

LIGHTING
FOR ARCHITECTURAL,
HOSPITALITY &
RETAIL APPLICATIONS

-ON

Maga Series Datasheet

Low-Voltage Track

Ami-Zoom



01

Ami-Filter




02

Cubo



03

Dabo



04

Pixy




05

Casa



06

Bande



07

Bande Diffuser



08

Ami-Pendant




09

Canos



10


Navia



11

Mains Voltage Recessed

Ami-Round
Zoom




12

Ami-Rectangle
Zoom




13

Ami-Square
Zoom



14

Ami-Round
Filter




15

Ami-Rectangle
Filter



16

Ami-Square
Filter



17

Ami-Zoom Low-Voltage Track




- White
- Black

Features



Dimensions



Electrical system

Total power consumption:	10W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	Bridgelux-C8-B
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	18°-45°
UGR:	<16

Housing

Lamp body diameter:	50mm
Material:	Aluminum
Weight:	271,4g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
18°-45°	288lm	320lm	350lm

Nomenclature

*Applicable model: M40310xx90xxxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.	
M403	10(10W)	27(2700K)	90(90)	Z2(18°-45°)	N(Non-Dim)	01(Black)	
		30(3000K)				A(0-10V dim)	02(White)
		40(4000K)				D(Dali dim)	

Ami-Filter Low-Voltage Track




- White
- Black

Features



Dimensions



Electrical system

Total power consumption:	9W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	CREE XHP35
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	7° / 15° / 24° / 38° / 10°x35° / Honeycomb
UGR:	<16

Housing

Lamp body diameter:	50mm
Material:	Aluminum
Weight:	255,6g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

* The lumen output is measured by the original optics (7°).

Angle \ CCT	2700K	3000K	4000K
7°	450lm	500lm	550lm

Nomenclature

*Applicable model: M40409xx90xxxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M404	09(09W)	27(2700K)	90(90)	07(7°)	N(Non-Dim)	01(Black)
		30(4000K)		15(15°)	A(0-10V dim)	02(White)
		40(4000K)		24(24°)	D(Dali dim)	
				38(38°)		
				X1(10°x35°)		
				HC(Honeycomb)		

Cubo Low-Voltage Track



Electrical system

Total power consumption:	9W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	CREE XHP35
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	7°/15° /24° /38° /10°x35° /Honeycomb
UGR:	<16

- White
- Black



Features



Housing

Lamp body diameter:	56.3mm x 56.3mm
Material:	Aluminum
Weight:	304,6g

Dimensions



Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

* The lumen output is measured by the original optics (7°).

Angle \ CCT	2700K	3000K	4000K
7°	405lm	450lm	500lm

Nomenclature

*Applicable model: M40510xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M405	09(9W)	27(2700K)	90(90)	07(7°)	N(Non-Dim)	01(Black)
		30(3000K)		15°(15°)		A(0-10V dim)
		40(4000K)		24°(24°)	D(Dali dim)	
				38°(38°)		
				X1(10°x35°)		
				HC(Honeycomb)		

Dabo Low-Voltage Track



Electrical system

Total power consumption:	10W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	CREE XPE
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	10°
UGR:	<16

- White
- Black


Features



Housing

Lamp body diameter:	55,9mm x 55,9mm
Material:	Aluminum
Weight:	266g

Dimensions

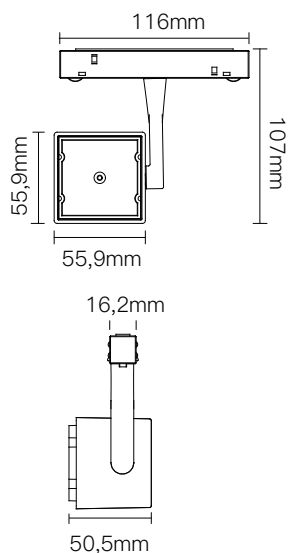

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
10°	504lm	560lm	616lm

Nomenclature

*Applicable model: M40610xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.	
M406	10(10W)	27(2700K)	90(90)	10(10°)	N(Non-Dim)	01(Black)	
		30(3000K)				A(0-10V dim)	02(White)
		40(4000K)				D(Dali dim)	

Pixy Low-Voltage Track



Electrical system

Total power consumption:	7W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source



LED type:	Lediamond LED
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	Wash wall
UGR:	<19

- White
- Black

Features



Dimensions



Housing

Lamp body diameter:	108mm x 73,9mm
Material:	Aluminum+PMMA
Weight:	178,8g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
Wash wall	504lm	560lm	610lm

Nomenclature

*Applicable model: M40410xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M401	07(7W)	27(2700K)	90(90)	WW(Wall Wsah)	N(Non-Dim)	01(Black)
		30(3000K)			A(0-10V dim)	02(White)
		40(4000K)			D(Dali dim)	

Casa Low-Voltage Track



Electrical system

Total power consumption:	12W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	Osram 3030
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	Asymmetric (30°)
UGR:	<19

- White
- Black



Features



Housing

Lamp body diameter:	63,5mm x 123,4mm
Material:	Aluminum
Weight:	212,5g

Dimensions



Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
30°	468lm	520lm	570lm

Nomenclature

*Applicable model: M40213xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.	
M402	12(12W)	27(2700K)	90(90)	30(30°)	N(Non-Dim)	01(Black)	
		30(3000K)				A(0-10V dim)	02(White)
		40(4000K)				D(Dali dim)	

Bande Low-Voltage Track







- White
● Black

Features



Dimensions



Electrical system

Total power consumption:	6W / 10W / 20W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	Bridgelux 3030
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	38°
UGR:	<16

Housing

Lamp body diameter:	118mm x 22mm / 231mm x 22mm / 460mm x 22mm
Material:	Aluminum
Weight:	110,3g / 178,2g / 316,5g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
38° (6W)	315lm	350lm	385lm
38° (10W)	450lm	500lm	550lm
38° (20W)	990lm	1100lm	1210lm

Nomenclature

*Applicable model: M410xxxx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M410	06(10W)	27(2700K)	90(90)	38(38°)	N(Non-Dim)	01(Black)
	10(10W)	30(3000K)			A(0-10V dim)	02(White)
	20(10W)	40(4000K)			D(Dali dim)	

Bande Diffuser Low-Voltage Track




- White
- Black

Features



Dimensions

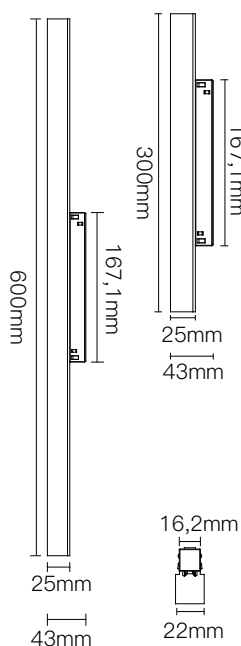

Electrical system

Total power consumption:	11W / 20W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	Bridgelux SMD2835
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	Flood(120°)
UGR:	<16

Housing

Lamp body diameter:	300mm x 22mm / 600mm x 22mm
Material:	Aluminum
Weight:	199,3g /313,8g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
Flood (11W)	459lm	510lm	560lm
Flood (20W)	945lm	1050lm	1155lm

Nomenclature

*Applicable model: M411xxxx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M411	11(11W)	27(2700K)	90(90)	FD(Flood)	N(Non-Dim)	01(Black)
	20(20W)	30(3000K)			A(0-10V dim)	02(White)
		40(4000K)			D(Dali dim)	

Ami Pendant Low-Voltage Track




- White
● Black

Features



Dimensions

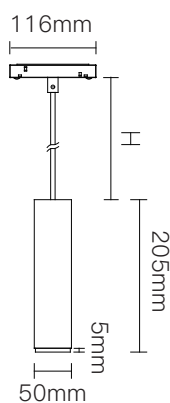

Electrical system

Total power consumption:	9W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	CREE XHP35
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	7° / 15° / 24° / 38° / 10°x35° / Honeycomb
UGR:	<19

Housing

Lamp body diameter:	50mm
Material:	Aluminum
Weight:	425g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
7°	369lm	410lm	450lm

Nomenclature

*Applicable model: M40713xx90xxxx (xx: dynamic codes)


Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M407	09(9W)	27(2700K)	90(90)	07(7°)	N(Non-Dim)	01(Black)
		30(3000K)		15(15°)		A(0-10V dim)
		40(4000K)		24(24°)	D(Dali dim)	
				38(38°)		
				X1(10°x35°)		
			HC(Honeycomb)			

Canos Low-Voltage Track




- White
● Black

Features



Dimensions

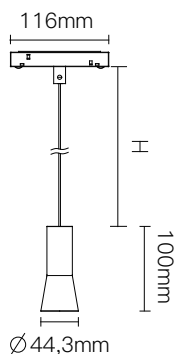

Electrical system

Total power consumption:	7W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	TOYONIA Y3C
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	15° / 24° / 36°
UGR:	<16

Housing

Lamp body diameter:	44,3mm
Material:	Aluminum
Weight:	173,9g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
15°	324lm	360lm	396lm
24°	360lm	400lm	440lm
38°	342lm	380lm	420lm

Nomenclature

*Applicable model: M40807xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M408	07(7W)	27(2700K)	90(90)	15(15°)	N(Non-Dim) A(0-10V dim) D(Dali dim)	01(Black)
		30(3000K)		24(24°)		02(White)
		40(4000K)		36(36°)		

Navia Low-Voltage Track




- White
● Black

Features



Dimensions

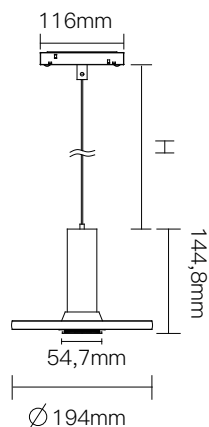

Electrical system

Total power consumption:	7W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	Bridgelux-C8-B
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	24°
UGR:	<16

Housing

Lamp body diameter:	54,7mm
Material:	Aluminum
Weight:	430,4g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
24°	360lm	400lm	440lm

Nomenclature

*Applicable model: M40913xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M409	07(7W)	27(2700K)	90(90)	24(24°)	N(Non-Dim)	01(Black)
		30(3000K)			A(0-10V dim)	02(White)
		40(4000K)			D(Dali dim)	

Ami-Round Mains Voltage Recessed


Zoom





Motorised Downlight.
Integrated power supply.

- White
 Black

Features



Dimensions

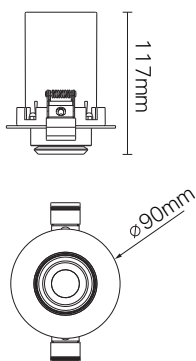

Electrical system

Total power consumption:	10W
Power input:	220Vac
Operating temperature:	-10°C ~ 35°C
Power factor:	>0.95
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	CREE CXA1507
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	18°-45°
UGR:	<16

Housing

Lamp body diameter:	90mm
Material:	Aluminum
Weight:	445g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
18°-45°	290lm	320lm	350lm

Nomenclature

*Applicable model: M20110xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.	
M201	10(10W)	27(2700K)	90(90)	Z2(18°-45°)	N(Non-Dim)	01(Black)	
		30(3000K)				A(0-10V dim)	02(White)
		40(4000K)				D(Dali dim)	

Ami-Rectangle Mains Voltage Recessed


Zoom






Motorised Downlight.
Integrated power supply.

- White
● Black

Features



Dimensions



Electrical system

Total power consumption:	10W*2
Power input:	220Vac
Operating temperature:	-10°C ~ 35°C
Power factor:	>0.95
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	CREE CXA1507
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	18°-45°
UGR:	<16

Housing

Lamp body diameter:	180mm X 90mm
Material:	Aluminum
Weight:	885g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
18°-45°	290lm*2	320lm*2	350lm*2

Nomenclature

*Applicable model: M20320xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.	
M203	20(20W)	27(2700K)	90(90)	Z2(18°-45°)	N(Non-Dim)	01(Black)	
		30(3000K)				A(0-10V dim)	02(White)
		40(4000K)				D(Dali dim)	

Ami-Square Mains Voltage Recessed


Zoom




Motorised Downlight.
Integrated power supply.

- White
 Black

Features



Dimensions

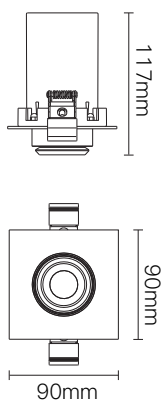

Electrical system

Total power consumption:	10W
Power input:	220Vac
Operating temperature:	-10°C ~ 35°C
Power factor:	>0.95
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	CREE CXA1507
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	18°-45°
UGR:	<16

Housing

Lamp body diameter:	90mm x 90mm
Material:	Aluminum
Weight:	420g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

Angle \ CCT	2700K	3000K	4000K
18°-45°	290lm	320lm	350lm

Nomenclature

*Applicable model: M20310xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.	
M203	10(10W)	27(2700K)	90(90)	Z2(18°-45°)	N(Non-Dim)	01(Black)	
		30(3000K)				A(0-10V dim)	02(White)
		40(4000K)				D(Dali dim)	

Ami-Round

Mains Voltage Recessed


Filter






Motorised Downlight.
Integrated power supply.

- White
● Black

Features



Dimensions



Electrical system

Total power consumption:	10W
Power input:	220Vac
Operating temperature:	-10°C ~ 35°C
Power factor:	>0.95
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	CREE XHP35
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	15° /24° /38° /10°x35° /Honeycomb
UGR:	<16

Housing

Lamp body diameter:	90mm
Material:	Aluminum
Weight:	445g

Warranty

Period: 5-year warranty

Lumen output * The lumen output is measured by the original optics (7°).

Angle \ CCT	2700K	3000K	4000K
7°	370lm	410lm	450lm

Nomenclature

*Applicable model: M2040xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M204	10(10W)	27(2700K)	90(90)	07(7°)	N(Non-Dim)	01(Black)
		30(3000K)		15°(15°)		A(0-10V dim)
		40(4000K)		24°(24°)	D(Dali dim)	
				38°(38°)		
				X1(10°x35°)		
				HC(Honeycomb)		

Ami-Rectangle Mains Voltage Recessed Filter






Motorised Downlight.
Integrated power supply.

- White
● Black

Features



Dimensions



Electrical system

Total power consumption:	10W*2
Power input:	220Vac
Operating temperature:	-10°C ~ 35°C
Power factor:	>0.95
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	CREE XHP35
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	15° /24° /38° /10°x35° /Honeycomb
UGR:	<16

Housing

Lamp body diameter:	180mm x 90mm
Material:	Aluminum
Weight:	885g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output * The lumen output is measured by the original optics (7°).

Angle \ CCT	2700K	3000K	4000K
7°	370lm*2	410lm*2	450lm*2

Nomenclature

*Applicable model: M20520xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M205	20(20W)	27(2700K)	90(90)	07(7°)	N(Non-Dim)	01(Black)
		30(3000K)		15°(15°)		
		40(4000K)		24°(24°)	D(Dali dim)	
				38°(38°)		
		X1(10°x35°)				
		HC(Honeycomb)				


Ami-Square Mains Voltage Recessed Filter






Motorised Downlight.
Integrated power supply.

- White
● Black

Features



Dimensions



Electrical system

Total power consumption:	10W
Power input:	220Vac
Operating temperature:	-10°C ~ 35°C
Power factor:	>0.95
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	CREE XHP35
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	15° /24° /38° /10°x35° /Honeycomb
UGR:	<16

Housing

Lamp body diameter:	90mm x 90mm
Material:	Aluminum
Weight:	420g

Warranty

Period: 5-year warranty

Lumen output * The lumen output is measured by the original optics (7°).

Angle \ CCT	2700K	3000K	4000K
7°	370lm	410lm	450lm

Nomenclature

*Applicable model: M20610xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.	
M206	10(10W)	27(2700K)	90(90)	07(7°)	N(Non-Dim)	01(Black)	
		30(3000K)		15°(15°)			A(0-10V dim)
		40(4000K)		24°(24°)	D(Dali dim)		
				38°(38°)			
		X1(10°x35°)					
HC(Honeycomb)							