


Ami Pendant Low-Voltage Track




- White
● Black

Features



Dimensions

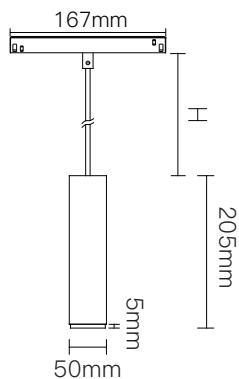

Electrical system

Total power consumption:	9W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	SMD
CCT:	2700K/3000K/4000K/Tunable
CRI:	Ra>90
Beam angle:	7° /15° /24° /38° /10°x35° /Honeycomb
UGR:	<19

Housing

Lamp body diameter:	50mm
Material:	Aluminum
Weight:	425g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

BA. \ CCT	2700K	3000K	4000K
7°	369lm	410lm	450lm

Nomenclature

*Applicable model: M40713xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M407	09(9W)	27(2700K)	90(90)	07(7°)	N(Non-Dim)	01(Black)
		30(3000K)		15(15°)	A(0-10V dim)	02(White)
		40(4000K)		24(24°)	D(Dali DT6)	
				38(38°)		
				X1(10°x35°)		
				HC(Honeycomb)		
		TW(Tunable)		18(18°)	E(Dali DT8)	
				24(24°)		
				38(38°)		

Illuminance distance data

Ami-pendant

7°

9W



	h(m)	E(lx)	Ø (m)	S_B(sq.m)
1	8318.94	0.17	0.025	
2	2079.74	0.35	0.1	
3	924.33	0.52	0.2	
4	519.93	0.69	0.4	
5	332.76	0.87	0.6	