


Bande Diffuser Low-Voltage Track




- White
- Black

Features



Dimensions

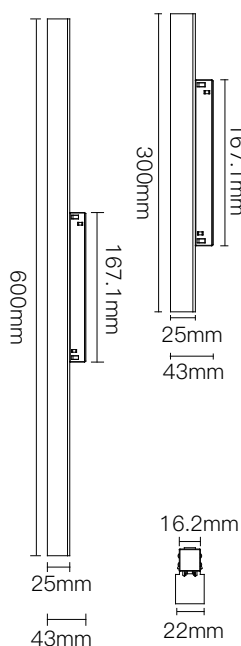

Electrical system

Total power consumption:	11W / 20W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	SMD
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	Flood

Housing

Lamp body diameter:	300mm x 22mm / 600mm x 22mm
Material:	Aluminum
Weight:	199.3g /313.8g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

BA. \ CCT	2700K	3000K	4000K
Flood (11W)	459lm	510lm	560lm
Flood (20W)	945lm	1050lm	1155lm
Glarefree-W (11W)	322lm	357lm	392lm
Glarefree-W (20W)	662lm	735lm	809lm

Nomenclature

*Applicable model: M411xxxx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M411	11(11W)	27(2700K)	90(90)	FD(Flood)	N(Non-Dim)	01(Black)
	20(20W)	30(3000K)		GW(Glarefree-W)	A(0-10V dim)	02(White)
		40(4000K)			D(Dali dim)	
		TW(Tunable)				

Illuminance distance data

Bande diffuser

11W



Flood

h(m)	E(lx)	Ø (m)	S_B(sq.m)
1	241.01	2.60x2.42	5.0
2	60.25	5.20x4.83	19.9
3	26.78	7.80x7.25	44.7
4	15.06	10.40x9.66	79.5
5	9.64	13x12.08	124.2

Bande diffuser

20W



Flood

h(m)	E(lx)	Ø (m)	S_B(sq.m)
1	452.45	2.68x2.51	5.3
2	113.11	5.36x5.01	21.2
3	50.27	8.05x7.52	47.8
4	28.28	10.40x9.66	84.9
5	18.10	13x12.08	132.7