

Astral Pendant P46




Pendant light
Integrated power supply



Housing
○ White

Lampshade
● Gold

Features

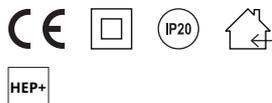

Dimensions

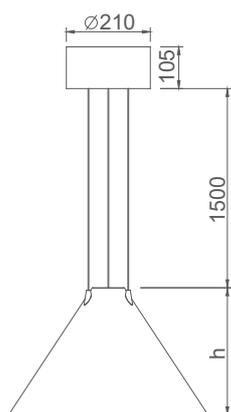

Electrical system

Total power consumption:	25 + 8 W
Power input:	220-240Vac, 50/60Hz
Operating temperature:	-10 °C ~ 35 °C
Power factor:	>0.95
Protection class:	Class II
Control protocol:	HEP+

Light source

LED type:	COB/SMB
Luminous flux:	1200 + 360 lm
Colour temperature (CCT):	2700-5700 K
Colour consistency (SDCM):	≤2
Colour rendering index (CRI):	Ra >90
Beam angle (BA):	(9°) mit Filter 50°

Housing

Material:	Aluminium
Weight:	x,x kg



Warranty

Period:	5 years
---------	---------

Luminous intensity distribution curves

Light distribution

BA 50°		
H (m)	En (lx)	S (sq.m)
1	1337	0,9
2	334	3,5
3	148	7,9
4	83	14,1
5	53	22,0

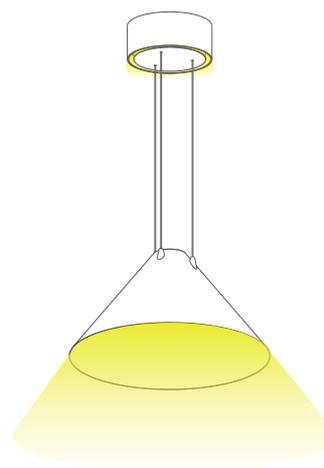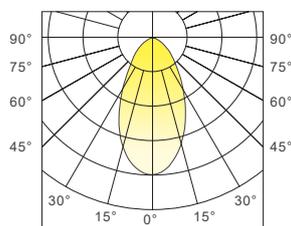

Nomenclature

Type	Series name	System power	CCT	CRI	Beam angle	Control	Colour
PL01	Astral	33 (25/8W)	TW (2700-5700K)	90 (90)	Y1 (9° + 50° Filter)	8 (HEP+)	04 (Gold)

*Applicable model: PL0133TW90Y1804-xx (xx: see page 2)

Tolerance: ±2mm


Astral P46

Accessories / Variants


Mounting - with trimless frame



Lampshade sizes



Typ 1
 h 229 mm
 d 380 mm



Typ 2
 h 320 mm
 d 500 mm

Nomenclature PL0133TW90Y1804-xx

Type	Mounting	Dimensions of lampshade
-01	Mounting with frameless mounting ring	d 380 x h 229 mm
-02	Surface	d 380 x h 229 mm
-03	Mounting with frameless mounting ring	d 500 x h 320 mm
-04	Surface	d 500 x h 320 mm