


Claro D124-2




Downlight
Integrated power supply

- White
● Black

Features



Dimensions

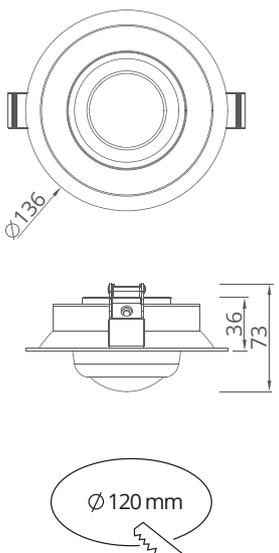

Electrical system

Total power consumption:	10 W
Power input:	100-240Vac, 50/60Hz
Operating temperature:	-10 °C ~ 35 °C
Power factor:	>0.95
Protection class:	Class II
Control protocol:	Non-DIM / Phase / 0-10V / DALI

Light source

LED type:	COB
Luminous flux:	920 lm
Colour temperature (CCT):	2700 K / 3000 K / 4000 K / Tunable
Colour rendering index (CRI):	Ra >90
Beam angle (BA):	85°

Housing


Material:	Aluminium
Weight:	x,x kg

Warranty

Period:	5 years
---------	---------

Luminous intensity distribution curves

BA 85°			
H (m)	En (lx)	S (sq.m)	
1	617	2,9	
2	154	11,7	
3	68	26,3	
4	38	46,8	
5	24	73,2	



Nomenclature

Type	Series name	System power	CCT	CRI	Beam angle	Control	Colour
DL	CD1242	10 (10W)	27 (2700K)	90 (90)	85 (85°)	N (Non-Dim)	01 (Black)
			30 (3000K)			P (Phase Dim)	02 (White)
			40 (4000K)			A (0-10V Dim)	
			TW (2700-5700K)			D (DALI-DT6)	
						E (DALI-DT8)	

*Applicable model: DLCD124210xx9085xxx (xx: dynamic codes)

Tolerance: ±2mm