

Mobi Wallwash


Low-Voltage Tracksystem



Low-voltage track
Integrated power supply

- White
- Black

Features

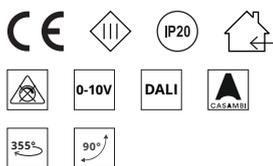

Electrical system

Total power consumption:	12 W
Power input:	48 Vdc
Operating temperature:	-10 °C ~ 35 °C
Protection class:	III
Control protocol:	Non-DIM / 0-10V / DALI / CASAMBI

Light source

LED type:	COB
Luminous flux:	510 lm
Colour temperature (CCT):	2700 K / 3000 K / 4000 K / Tunable
Colour rendering index (CRI):	Ra >90
Beam angle (BA):	Wallwash

Housing

Material:	Aluminium
Weight:	x,x kg


Warranty

Period:	5 years
---------	---------

Luminous intensity distribution curves


BA Wallwash

H (m)	En (lx)	S (sq.m)
1	693	0.5
2	173	2.1
3	77	4.6
4	43	8.2
5	27	12.9

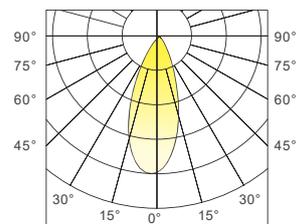

Dimensions

S58-L

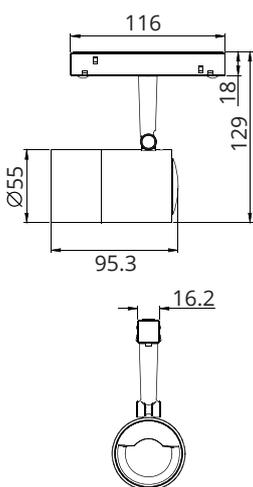

Nomenclature

Product Code	System power	CCT	CRI	Beam angle	Control	Colour
M423	12 (12W)	27 (2700K)	90 (90)	WW (Wallwassh)	N (Non-Dim)	01 (Black)
		30 (3000K)			A (0-10V Dim)	02 (White)
		40 (4000K)			7 (CASAMBI)	
					D (DALI-DT6)	
					E (DALI-DT8)	
		TW (2700-5700K)				

Tolerance: ±2mm

*Applicable model: M42312xx90Z6xxx (xx: dynamic codes)