


# Navia Low-Voltage Track




- White  
● Black

## Features



## Dimensions

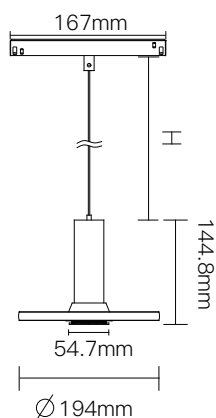

## Electrical system

<b>Total power consumption:</b>	7W
<b>Power input:</b>	48V
<b>Operating temperature:</b>	-10°C ~ 35°C
<b>Dimming option:</b>	0-10V / Dali / Casambi
<b>Insulation class:</b>	Class III

## Light source

<b>LED type:</b>	COB
<b>CCT:</b>	2700K/3000K/4000K
<b>CRI:</b>	Ra>90
<b>Beam angle:</b>	24°
<b>UGR:</b>	<16

## Housing

<b>Lamp body diameter:</b>	194mm
<b>Material:</b>	Aluminum
<b>Weight:</b>	430.4g

## Warranty

<b>Period:</b>	5-year warranty
----------------	-----------------

## Lumen output

BA. \ CCT	2700K	3000K	4000K
24°	360lm	400lm	440lm

## Nomenclature

\*Applicable model: M40913xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M409	07(7W)	27(2700K)	90(90)	24(24°)	N(Non-Dim)	01(Black)
		30(3000K)			A(0-10V dim)	02(White)
		40(4000K)			D(Dali dim)	

# Illuminance distance data

## Navia

7W



24°

h(m)	E(lx)	Ø (m)	S_B(sq.m)
1	2207.84	0.41	0.1
2	551.96	0.81	0.5
3	245.32	1.22	1.2
4	137.99	1.62	2.1
5	88.31	2.03	3.2